


LDR SENSOR

GL7

LDR SENSOR

16 f +e 0 1e

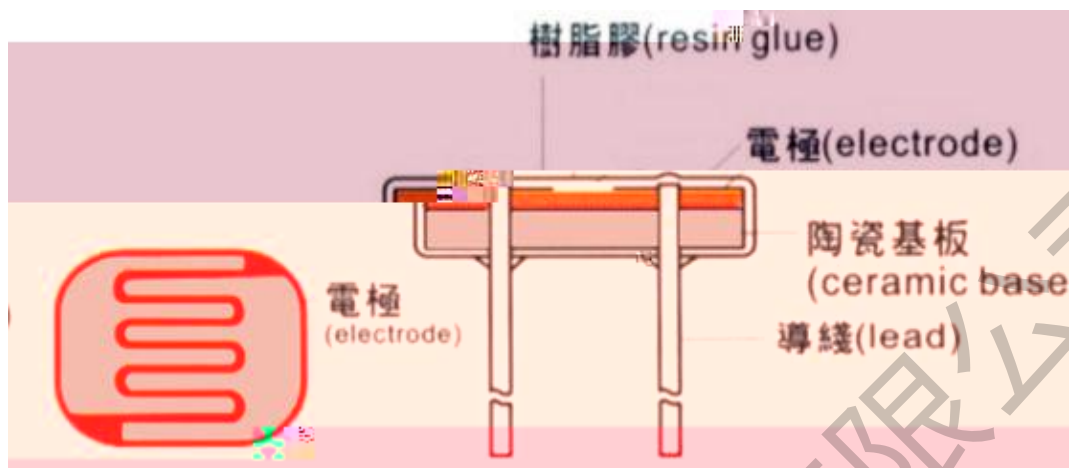



		VDC	mw		nm	10Lux (KΩ)	MΩ	y 100 10	(ms)		
Ø7	GL7516	150	100	-30 +70	540	5-10	0.5	0.6	30	30	2
	GL7528	150	100	-30 +70	540	10-20	1	0.6	30	30	3
	GL7537-1	150	150	-30 +70	560	20-30	2	0.7	30	30	4
	GL7537-2	150	150	-30 +70	560	30-50	4	0.8	30	30	4
	GL7539	150	150	-30 +70	560	50-100	8	0.8	30	30	6

0 0


10Lux ' k m 10 m 0 0

0 25


4000600Lux 0 2 0 2856K 10Lux

0 0

ì λ λ 5 λ m g m " ÷ g m

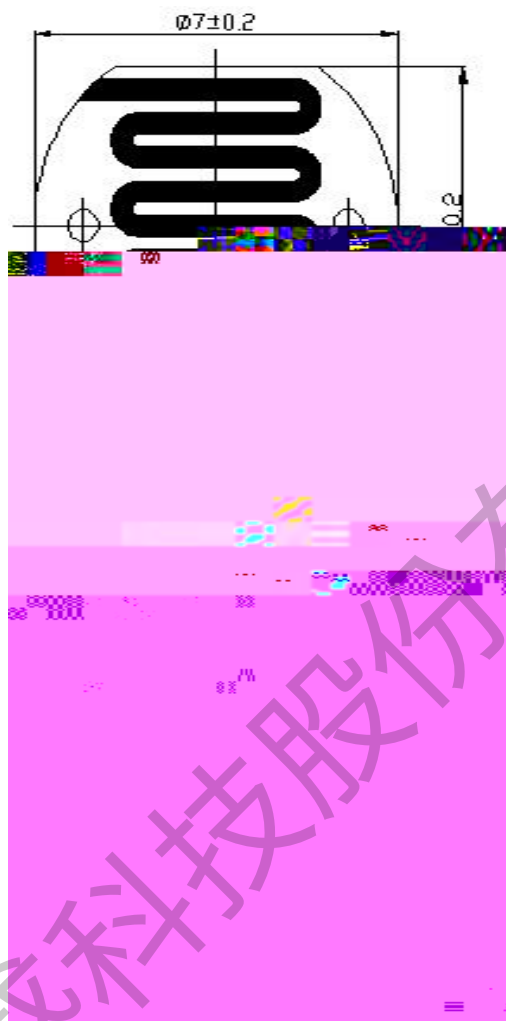


Relative Resistance (%)
電阻變化率 (%)

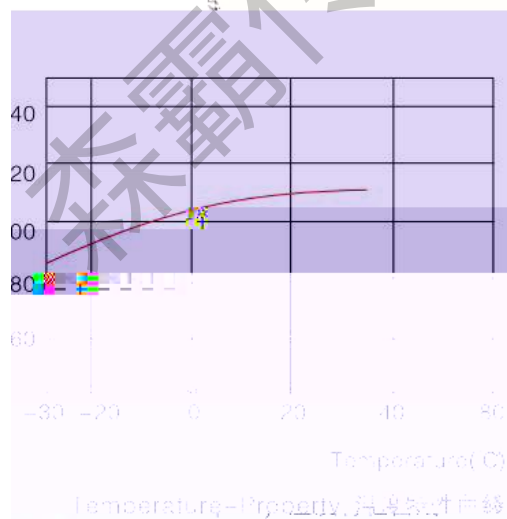



Temperature-Property, 溫度特性曲線

Relative Response (%)
相對靈敏度 (%)

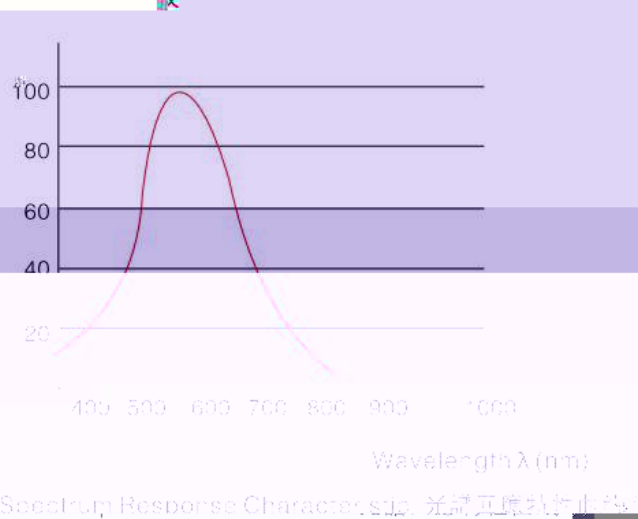

Spectrum Response Characteristics, 光譜響應特性曲線

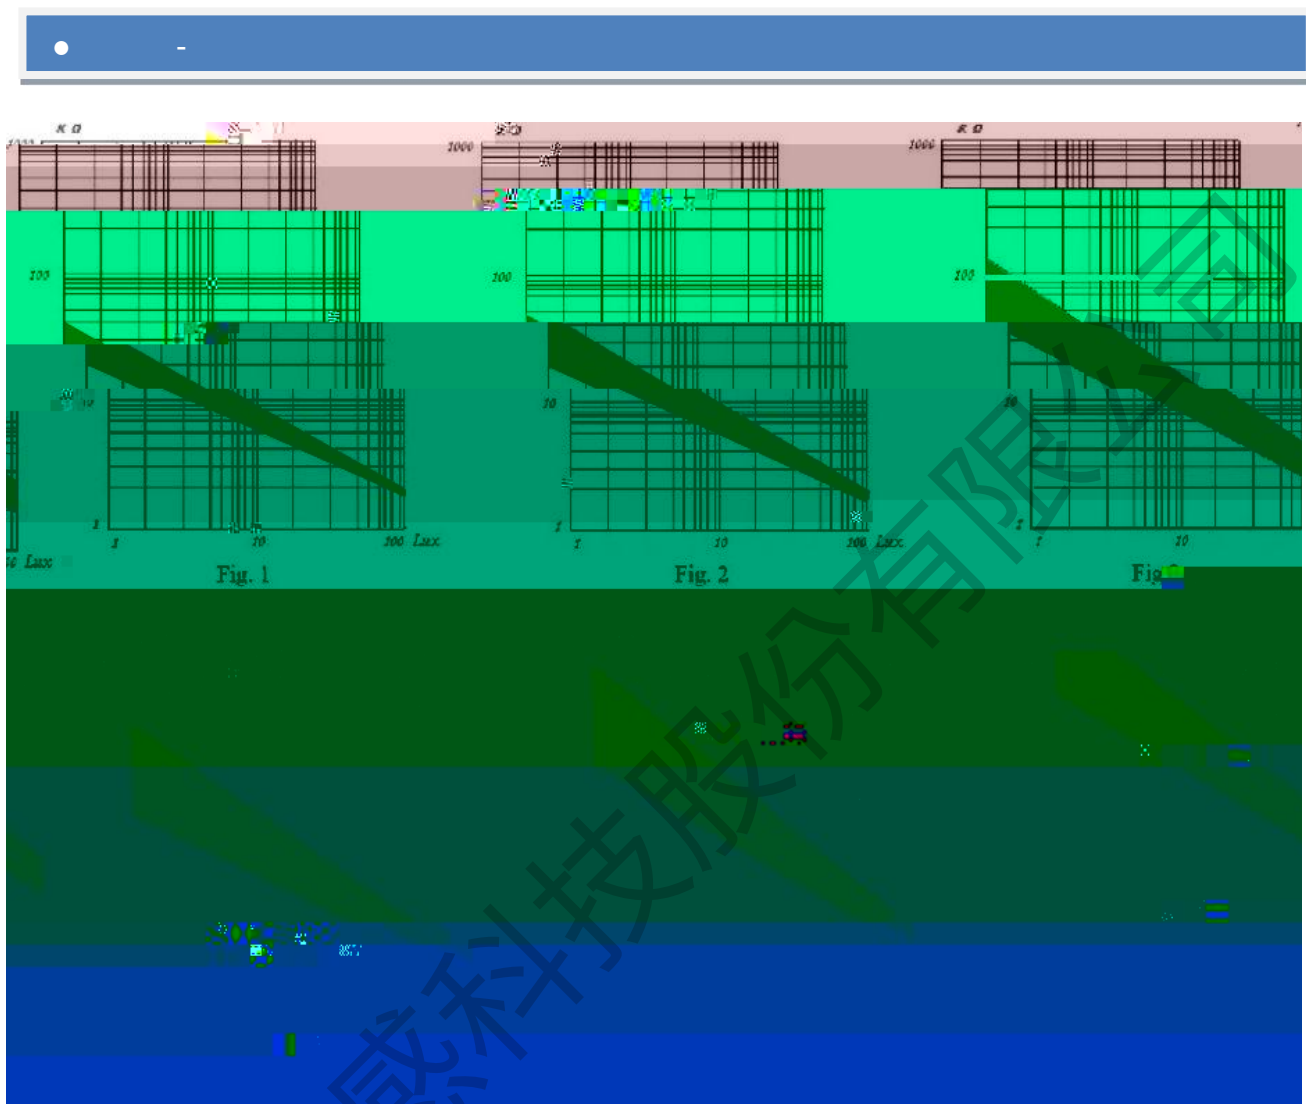



- 400 800
-
- $\geq 4\text{mm}$, 260
- 280 3