

±

±






-20	70		
-40	85		
		PG9	4-8mm
3/16"	φ 8	φ 6.5	
PC+ABS	94V-0		
495			

2 3

Model172M

(+EXC, -EXC, OUTPUT)
 13-30VDC
 0-5VDC 0-10VDC/RS485
 ≤ 5.0 OHMS
 * : $\pm 25\text{mV}$ (0-5VDC), $\pm 50\text{mV}$ (0-10VDC)
 : $\pm 25\text{mV}$ (0-5VDC), $\pm 50\text{mV}$ (0-10VDC)
 ≥ 10 50 ≥ 5 0-10VDC
 (/) (+EXC, -EXC)
 4-20mA/RS485
 12mA
 13-30VDC (1)
 ≤ 1050 OHMS
 * : $\pm 0.08\text{mA}$: $\pm 0.08\text{mA}$
 * 250 Ω 24VDC

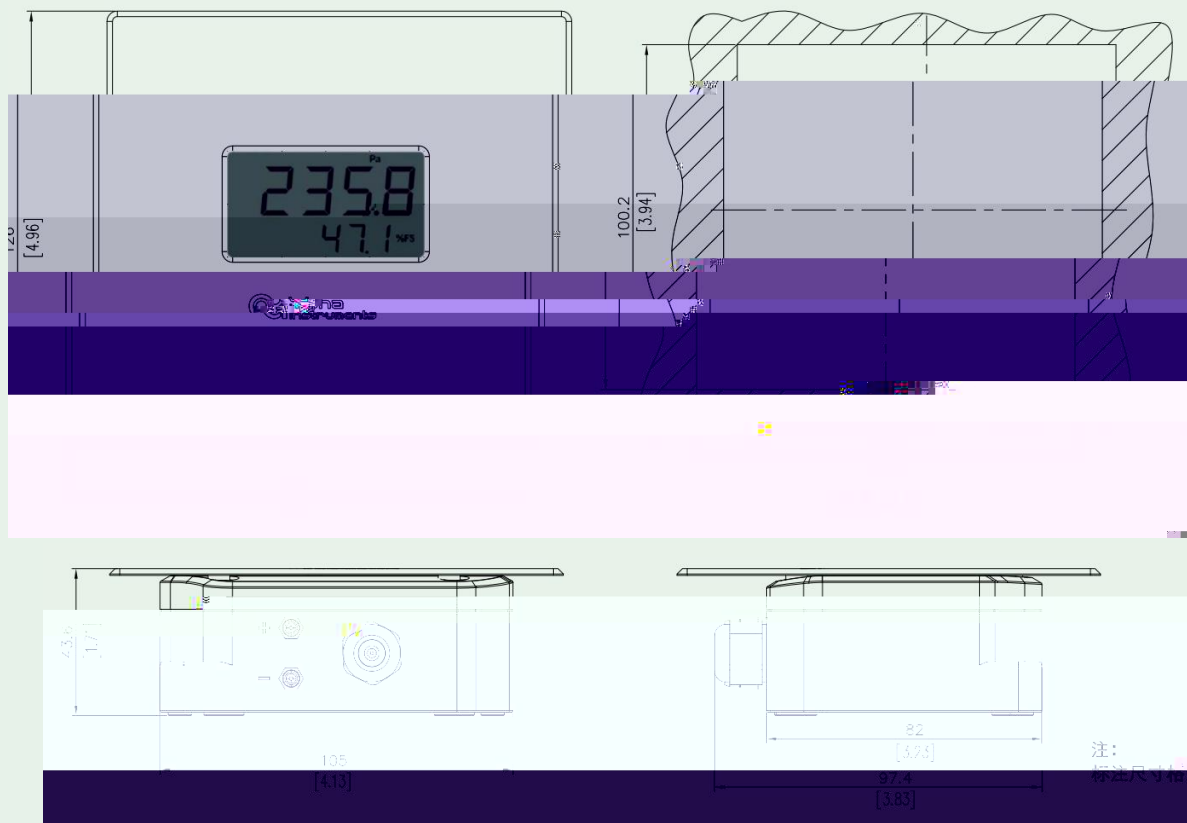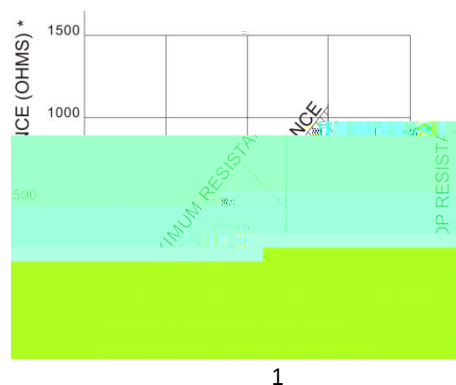

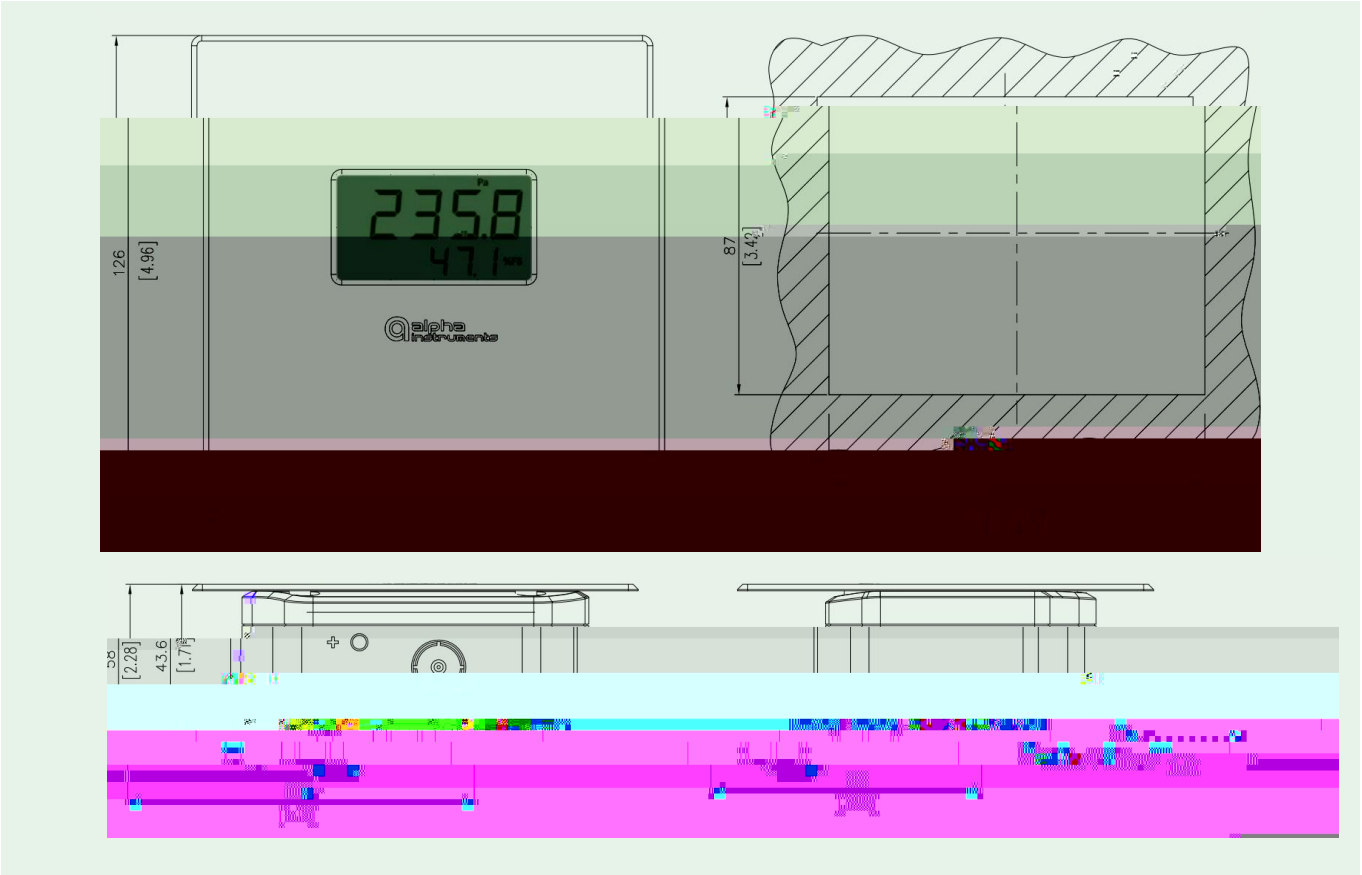

1.0%		3/16"	
1	7	2	M
P: Pascal	NNNN	D:	A: 4-20mA
W: in.W.C.		B:	B: 0-5V
		S:	C: 0-10V
			D: RS485
			1: 1.0%FS
			4: 0.4%FS
			2: 0.25%FS
			Y: ()
			N: ()
			A: Φ 3/16"
			B: Φ 8mm
			E: Φ 6.5mm
			S:
in.W.C.()	in.W.C.()	Pascal()	Pascal()